



US006373988B1

(12) **United States Patent**
Thorell et al.

(10) **Patent No.:** **US 6,373,988 B1**
(45) **Date of Patent:** **Apr. 16, 2002**

(54) **LOSSLESS IMAGE COMPRESSION WITH TREE CODING**

(75) Inventors: **Per Thorell**, Solna; **Torbjörn Einarsson**, Stockholm, both of (SE); **Filippo Passaggio**, Genova (IT)

(73) Assignee: **Telefonaktiebolaget LM Ericsson**, Stockholm (SE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/434,493**

(22) Filed: **Nov. 5, 1999**

Related U.S. Application Data

(63) Continuation of application No. PCT/SE98/00839, filed on May 7, 1998.

Foreign Application Priority Data

May 13, 1997 (SE) 970168-5

(51) Int. Cl.⁷ **G06K 9/36**

(52) U.S. Cl. **382/240; 358/426; 382/237**

(58) Field of Search **382/240, 232, 382/237; 348/384.1; 358/426, 262.1, 470**

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,261,018 A *	4/1981	Knowlton	358/470
4,858,017 A *	8/1989	Torbey	358/426
5,392,133 A *	2/1995	Nakajima	358/407
5,442,458 A *	8/1995	Rabbani et al.	358/426
5,881,173 A *	3/1999	Ohmori	382/232
5,978,507 A *	11/1999	Shackleton et al.	382/195

FOREIGN PATENT DOCUMENTS

EP	0 701 375 A2	3/1996
FR	2 725 060 A1	3/1996

* cited by examiner

Primary Examiner—Bhavesh Mehta


Assistant Examiner—Ali Bayat

(74) *Attorney, Agent, or Firm*—Nixon & Vanderhye P.C.

(57) **ABSTRACT**

In a method and a device for coding binary matrices, in particular sparse binary matrices, a matrix is gradually partitioned into sub-matrices. During the gradual partitioning the number of binary ones are counted for each resulting sub-matrix. If a resulting sub-matrix does not consist of mixed symbols no further partitioning of that sub-matrix is required. The counted number of binary ones for each sub-matrix is then coded and transmitted. The method provides an efficient coding particularly for sparse binary matrices such as bi-level images or bit maps.

12 Claims, 3 Drawing Sheets

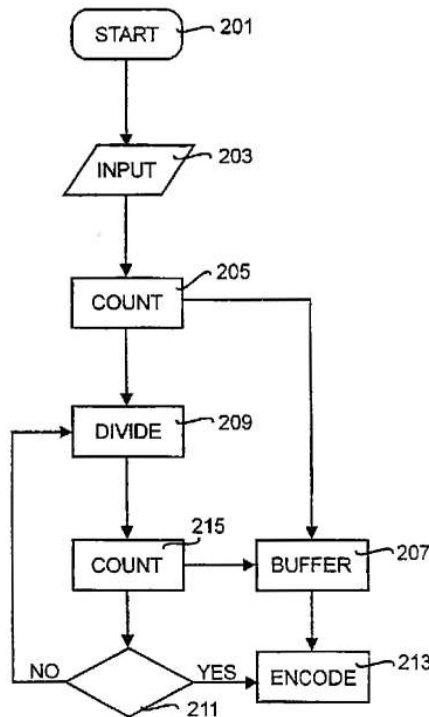

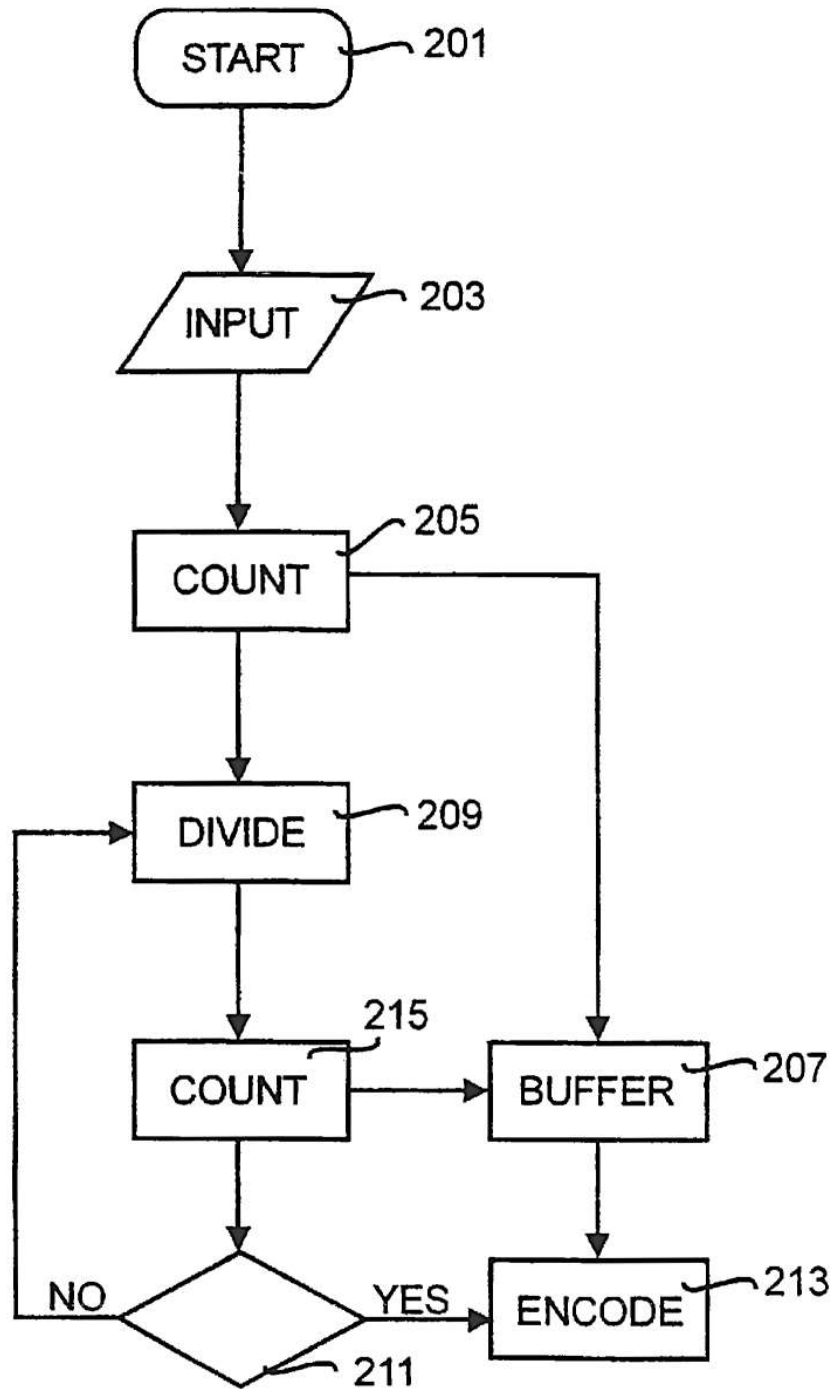


Fig. 2

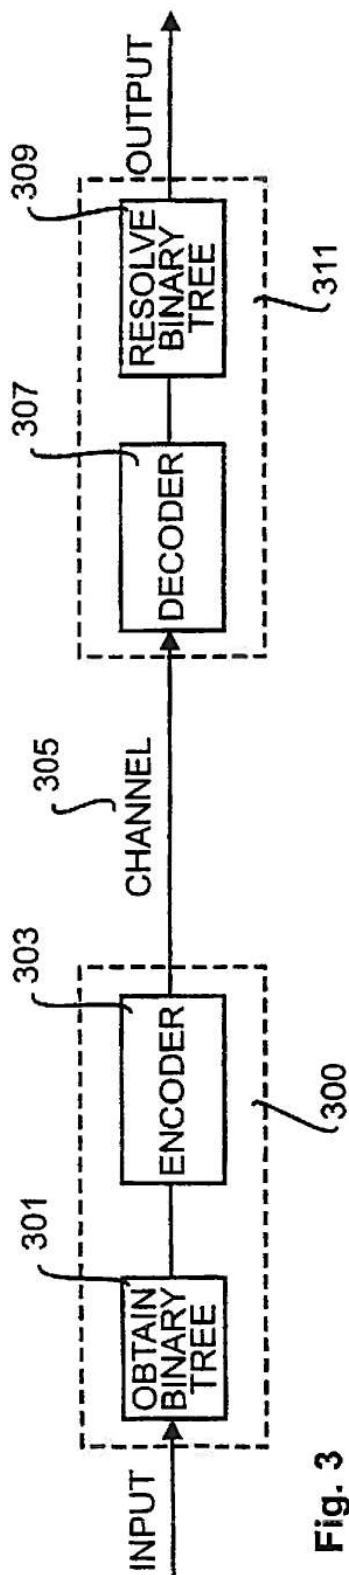


Fig. 3

1

LOSSLESS IMAGE COMPRESSION WITH TREE CODING

This is a continuation of PCT application No. PCT/SE98/00839, filed May 7, 1998, the entire content of which is hereby incorporated by reference in this application.

TECHNICAL FIELD

The present invention relates to a method and a device for image and video compression for efficient storage or transmission of images, in particular sparse bi-level images.

BACKGROUND OF THE INVENTION AND PRIOR ART

In recent years there has been an increased interest in video telephony and video conferences. One problem associated with video communication is that it normally requires a large amount of bandwidth. Although there has been a tremendous development in transmission technologies and bandwidth is getting cheaper there still exists a need to code the information in an efficient way, and thereby reduce the amount of bandwidth required. In the future, video compression is also likely to become very important in wireless multimedia communication systems, since the bandwidth of the radio frequency spectrum is a limited resource.

There are basically two different strategies that can be employed in order to compress data. The first strategy is to remove statistical redundancy. This is done by choosing a more efficient representation for the data. If there is no statistical redundancy in the data that can be removed and there still is a need for further compression, some of the information from the original data must be removed.

This latter technique is called lossy compression and is common in coding of audio and video, where features of sound and images that humans find less perceptible are removed. Most video compression techniques consist of a number of filtering and transformation steps that remove redundancy or unimportant details from the data.

In some applications it is desired to efficiently compress two-dimensional bitmaps. Such an application can, for example, be when transmitting bit plane coded images plane by plane. A bitmap of an entire bit plane or a part thereof must then be further processed in order to get a compact bitstream that can be transmitted or stored in an efficient way.

There exists a number of standard methods for compressing bi-level images, e.g. ITU-T G4, ISO JBIG and Quadtree coding.

Also, U.S. Pat. No. 4,261,018 describes a method for progressively transmitting a binary black and white image. The method divides such a binary image into smaller and smaller blocks until such a block is found to be consisting of only white or only black elements. When a certain size of small block is reached no further sub-division is performed, and the small blocks still comprising both white and black elements are coded.

The problem with the above methods is that they are not optimized, and therefore provide relatively poor results, for a number of different output patterns produced by a number of different algorithms, for example the algorithm described in our co-pending International patent application PCT/SE96/00943.

SUMMARY OF THE INVENTION

It is an object of the present invention to overcome the problems associated with the prior art and to increase the efficiency and performance in coding of bi-level images or matrices.

2

This object is obtained with a method and a device for coding binary matrices, in particular sparse binary matrices, a matrix is gradually partitioned into sub-matrices. During the gradual partitioning the number of binary ones are counted for each resulting sub-matrix. If a resulting sub-matrix does not consist of mixed symbols no further partitioning of that sub-matrix is required. The counted number of binary ones for each sub-matrix is then coded and transmitted.

Hence, for a bi-level image the method can comprise the following steps:

The bi-level image is first transformed into a labelled binary tree. The tree is then traversed and the values in the nodes are efficiently entropy coded with arithmetic coding. Each node in the binary tree obtained represents a specific area of the image. The values in the nodes contain the number of white pixels in the corresponding area of the image.

Thus, for a bi-level image, for example a bitmap where white pixels are coded with the binary symbol 1 and a black pixels with the binary symbol 0, a scheme can be designed in the following manner.

First, the number of binary ones in the bitmap are counted and the resulting number is placed in the root node of a binary tree.

The bitmap is then divided into two parts and the number of binary ones in each of the two parts is counted. The sum of the two numbers thus obtained will be equal to the number in the previous root node.

The binary tree is then extended by placing these two numbers as leaves to the root node.

Each sub-image obtained in this manner, which is not completely filled with either binary ones or zeros, is then divided again and the above steps are performed again.

Finally, when all sub-images of the original bitmap only consist of either only black or white pixels, the binary tree representing such a division is coded.

Such coding can for example be performed by means of entropy coding the sum in the root node, and then entropy coding the leaves of the node. This is preferably done using arithmetic coding. Since the sum of the two leaves is known from their node only one of the two leaves needs to be coded. The input to the arithmetic coder is the symbol denoting the number and a distribution function suitable for the type of image to be coded.

The way of dividing the bitmap is preferably predefined and known both by the coder and the decoder. Since the partitioning in such a case is coded implicitly, no information regarding the partitioning needs to be transmitted to the decoder.

This way of coding bi-level images has been found to provide very good results in terms of compression ratio. It has also been found to be particularly suited for coding bi-level images where the number of whites or blacks are known to be very dominant, so called sparse bi-level images.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail by way of non-limiting examples, and with reference to the accompanying drawings, in which:

FIGS. 1a-1f illustrate different steps carried out when representing and coding a bi-level image.

FIG. 2 is a flow chart for coding bi-level images.

FIG. 3 is a schematic view of a transmission system for bi-level images.

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.