


ROBERT C. JUVINALL
KURT M. MARSHEK

Fundamentals of MACHINE COMPONENT DESIGN

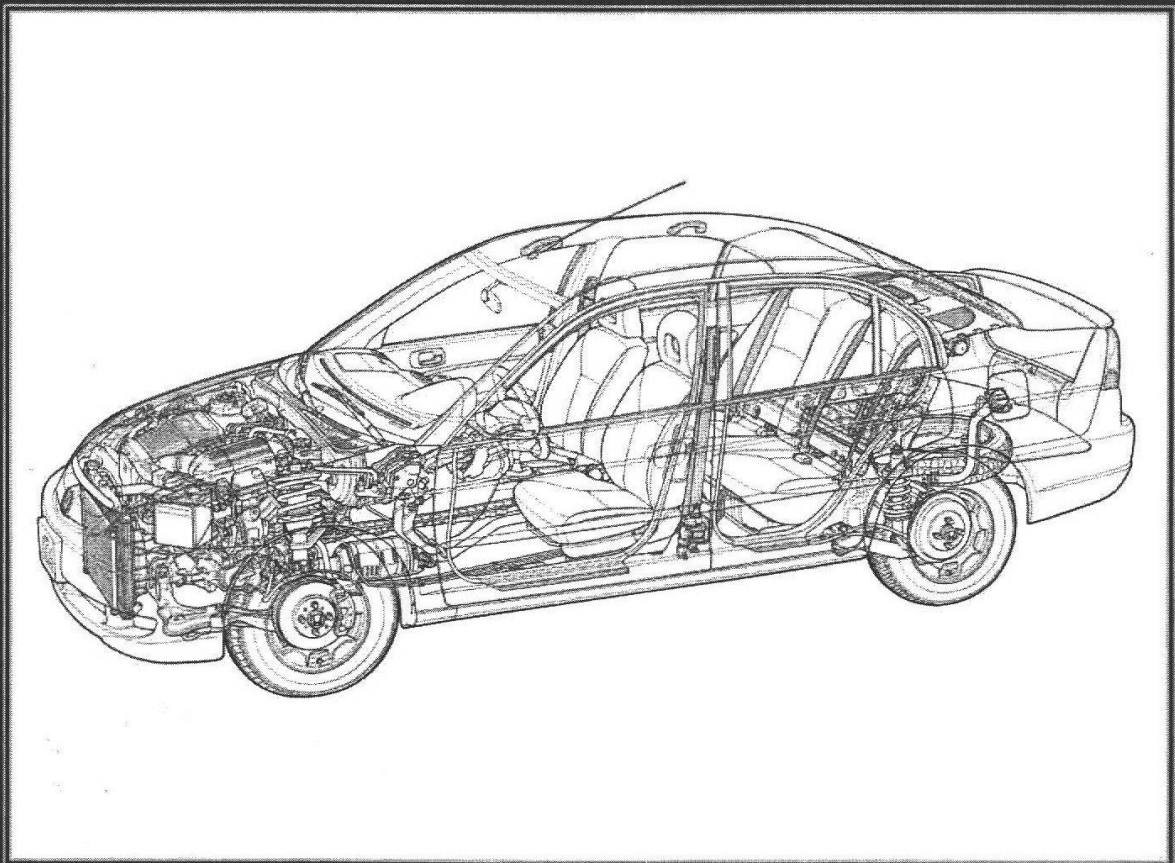

Fourth Edition

EXHIBIT 1011
WIT: Ellis
DATE: 10/13/17
Halma Reporting Group, Inc.

FOURTH EDITION

Fundamentals of Machine Component Design

ROBERT C. JUVINALL

Professor of Mechanical Engineering
University of Michigan

KURT M. MARSHEK

Professor of Mechanical Engineering
University of Texas at Austin



WILEY

JOHN WILEY & SONS, INC.

To Arleene and Linda

ACQUISITIONS EDITOR	Joseph Hayton
MARKETING MANAGER	Frank Lyman
SENIOR PRODUCTION EDITOR	Elizabeth Swain
ILLUSTRATIONS EDITOR	Sigmund Malinowski
COVER DESIGNER	Harry Nolan
MEDIA EDITOR	Thomas Kulesa

This book was set in Times 10/12 by Emilcomp and printed and bound by R. R. Donnelley & Sons. The cover was printed by Lehigh. Cover illustration: Courtesy American Honda Motor Co., Inc.

This book is printed on acid-free paper. ♾

Copyright © 2006 by John Wiley & Sons, Inc. All rights reserved.

No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, scanning or otherwise, except as permitted under Sections 107 or 108 of the 1976 United States Copyright Act, without either the prior written permission of the Publisher, or authorization through payment of the appropriate per-copy fee to the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, (978) 750-8400, fax (978) 646-8600, or on the web at www.copyright.com. Requests to the Publisher for permission should be addressed to the Permissions Department, John Wiley & Sons, Inc., 111 River Street, Hoboken, NJ 07030-5774; (201) 748-6011; fax (201) 748-6008, or online at <http://www.wiley.com/go/permissions>. To order books please call 1(800)225-5945.

The publisher and author make no warranty of any kind, express or implied with regard to the accuracy or completeness of the contents of this work and specifically disclaim all warranties, including without limitation any implied warranties of fitness for a particular purpose. Mechanical engineering design is sufficiently complex that its actual practice should always take advantage of the specialized literature in the area involved, the background of experience with related components, and appropriate tests to establish proper and safe performance. Neither the publisher nor the author shall be liable for any damages arising from the use or application of any information in this book.

Library of Congress Cataloging-in-Publication Data:

Juvinall, Robert C.

Fundamentals of machine component design / Robert C. Juvinall,

Kurt M. Marshek.— 4th ed.

p. cm.

Includes index.

ISBN 13 978-0-471-66177-1

ISBN 10 0-471-66177-5

I. Machine design. I. Marshek, Kurt M. II. Title.

TJ230.J88 2005

621.8'15—dc22

2005047031

Printed in the United States of America

10 9 8 7 6 5 4 3

CHAPTER 19

Miscellaneous Machine Components

19.1 Introduction

Power transmission between shafts can be accomplished in a variety of ways. In addition to gears (Chapters 15 and 16), *flexible elements* such as belts and chains are in common use. These permit power to be transmitted between shafts that are separated by a considerable distance, thus providing the engineer with greater flexibility in the relative placement of driving and driven machinery.

Belts are relatively quiet in operation. Except for timing belts (Figure 19.5), slippage between belt and pulleys causes speed ratios to be inexact. This slippage characteristic is sometimes used to advantage by permitting the pulleys to be moved closer together in order to disengage the drive, as in some snowblowers and self-propelled lawn mowers. This may save substantial cost, weight, and the bulk of providing a separate clutch. The flexibility and inherent damping in belts (and to a lesser extent in chains) serves to reduce the transmission of shock and vibration.

The design of chains illustrates the general proposition that if a component of desired characteristics is not already available, an engineer should consider the possibility of inventing something new. For example, the conventional roller and inverted-tooth chains discussed in Sections 19.5 and 19.6 require that all sprockets engaging a single chain lie in a common plane. Suppose a positive flexible drive is needed between sprockets lying in different planes. If little power is required, a "beaded chain" (similar to the pull cord on a plain light fixture) can be used. A stronger type of flexible chain incorporates parallel steel cables bonded to the sides of plastic cylindrical "buttons" that simulate the rollers of a conventional roller chain. A chain embodying this second concept was used between the pedal and propeller shafts of the Gossamer Albatross, the man-powered airplane that flew across the English Channel.

For transmitting small amounts of torque, flexible shafts often offer inexpensive solutions. The common automotive speedometer drive is a familiar example.

For transmitting power between nominally colinear shafts, flexible couplings, universal joints, and friction clutches have already been discussed. Another important general class of colinear members able to transmit power do so by *hydrodynamic*

action. These are fluid couplings (also called fluid clutches) and hydrodynamic torque converters.

Other types of power transmission devices use rope or cable and move or lift a weight, using power delivered to a rotating shaft. Examples include hoists, elevator drives, and capstans. The site <http://www.machinedesign.com> on mechanical systems presents information on mechanical cable and wire rope, flat belts, V-belts, metal belts, and chains.

19.2 Flat Belts

A belt drive transmits power between shafts by means of a belt connecting pulleys on the shafts. Large flat leather belts were in common use a few decades ago when one large motor or engine was often used to drive several pieces of machinery. In today's more limited use, thin, light, flat belts usually drive high-speed machines. Often, the vibration-isolating capability of the belt is an important consideration.

The basic equations for the limiting torque that can be transmitted by a flat belt are the same as for band brake torque,

$$T = (P_1 - P_2)r \quad (18.24)$$

and

$$P_1/P_2 = e^{f\phi} \quad (18.26)$$

where P_1 and P_2 are the tight and slack side belt tensions, f is the coefficient of friction, and ϕ is the angle of contact with the pulley (see Figure 18.15). These two equations enable P_1 and P_2 to be determined for any combination of T , f , and ϕ . The required initial belt tension P_i depends on the elastic characteristics of the belt, but it is usually satisfactory to assume that

$$P_i = (P_1 + P_2)/2 \quad (19.1)$$

Note that the capacity of the belt drive is determined by the angle of wrap ϕ on the *smaller* pulley and that this is particularly critical for drives in which pulleys of greatly differing size are spaced closely together. An important practical consideration is that the required initial tension of the belt not be lost when the belt stretches slightly over a period of time. Of course, one solution might be to make the initial installation with an excessive initial tension, but this would overload the bearings and shafts, as well as shorten belt life. Three methods of maintaining belt tension are illustrated in Figure 19.1. Note that all three show the slack side of the belt on top, so that its tendency to sag acts to increase the angle of wrap.

The coefficient of friction between belt and pulley varies with the usual list of environmental factors and with the extent of slippage. In addition to ordinary "torque transmission slippage," belts experience slip, commonly called "creep," through the slight stretch or contraction of the belt as its tension varies between P_1 and P_2 while going through angles ϕ in contact with the pulleys. For leather belting and cast-iron or steel pulleys, $f = 0.3$ is often used for design purposes. Rubber-coated belting usually gives a lower value (perhaps $f = 0.25$), whereas running on plastic pulleys usually

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.