



XLH[®] X-TENDED LIFE HEADER

INDUSTRY'S 1ST FABRIC REINFORCED HEADER RING

Product Bulletin 91
Rev C 02/01/17


FEATURES:

- Enhances ability of the header ring to resist nibbling
- Enhances abrasive resistance
- Enhances ED Resistance (Explosive Decompression)
- Enhances extrusion resistance
- Enables header ring to more effectively wipe solids off of the plunger, preventing them from getting to the pressure rings
- Enhances ability of the non-adjustable packing assembly due to reduced volume loss
- Increases packing assembly longevity 6-10 times

APPLICATIONS:

- Fracturing with high rate 100 mesh sand
- CO₂
- Cementing
- Hydrocarbon based fluids
- Acidizing to 18% HCl*

* Up to 18% HCl, Utex recommends Style 2108
19% HCl and higher, Utex recommends Style 2112

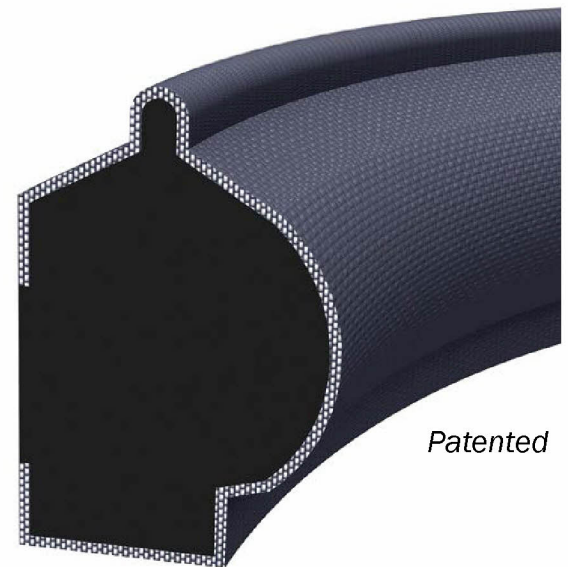

Utex Assembly P/N Nomenclature



XLH Style Numbers for Well Service Packing Assemblies

SSF Design Pressure Ring

SSF Style	Header Ring Material		
	HNBR	FKM	ED Resistant
1028 (490K)	2108	-	2128
1092 (126C)	-	2112	-
4501 (5707)	2101	2111	2121
1067 (46C)	2107	-	2127

SF Design Pressure Ring

SF Style	Header Ring Material		
	HNBR	FKM	ED Resistant
0798 (490K)	2198	-	2178
6670 (126C)	-	2180	-
4515 (5707)	2195	2185	2175
0817 (46C)	2197	-	2177

Utex Exhibit 2008
IPR2020-00333
Gardner Denver, Inc. v. Utex Industries, Inc.