

SubjuGator 2011

Abstract—Modern autonomous underwater vehicle (AUV) research is moving towards multi-agent system integration and control. Many university research projects, however, are restricted by cost to obtain even a single AUV platform. An affordable, robust AUV design is presented with special emphasis on modularity and fault tolerance, guided by previous platform iterations and historically successful AUV designs. Modularity is obtained by the loose coupling of typical AUV tasks such as navigation, image processing, and interaction with platform specific hardware. Fault tolerance is integrated from the lowest hardware levels to the vehicle's mission planning framework. Major system design features including electrical infrastructure, mechanical design, and software architecture are presented. Application to the 14th annual AUVSI Robosub competition are addressed.

I. INTRODUCTION

Leveraging 15 years of autonomous underwater vehicle (AUV) development experience at the University of Florida which produced 6 independent platform designs, the SubjuGator family of AUVs has progressed to accommodate advances in sensors, computing, and mission requirements culminating in the design of the current generation SubjuGator 7 vehicle. External design influences include commercially available underwater vehicles which are generally factored into two broad classes: long range, slender, underactuated vehicles and short range, precision movement, fully actuated vehicles. This large difference in capabilities forces the use of multiple vehicles, increasing necessary overhead. SubjuGator 7 is a novel attempt to bridge the gap between the separate design classes, and unify the capabilities of both into a single low cost platform.

The Autonomous Unmanned Vehicle Systems International (AUVSI) and the Office of Naval Research (ONR) are sponsors of the 14th Annual International Autonomous Underwater Vehicle Competition, to be held in San Diego, California at the Space and Naval Warfare Systems Command's (SPAWAR) Transducer Evaluation Center (TRANSDEC) facility July 13th through July 17th, 2011. The seventh

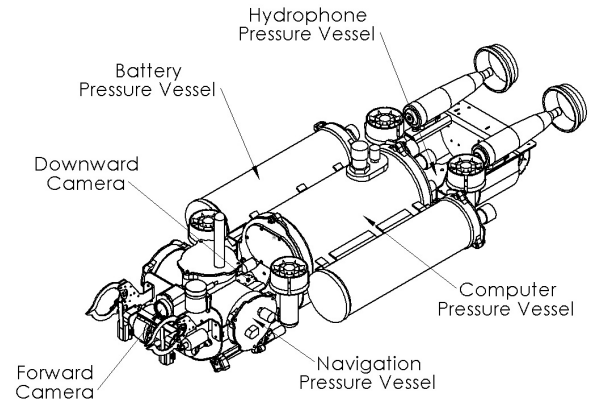


Figure 1: Assembly of SubjuGator 7 Pressure Vessels

meet the new challenges of the annual competition, but to engage in groundbreaking research initiatives.

II. HARDWARE DESIGN

A primary objective of SubjuGator 7 is the ability to sustain operation after a failure has occurred. To facilitate this goal, the vehicle is designed so that during a failure event (e.g., mechanical or electrical), the faulted system as a whole is still capable of completing a task, or at the very least, safely returning to a recovery point to be removed from the environment. A fault tolerant design motivates a modular system structure, with each module performing specific tasks while communicating with other modules via an ethernet medium. Modules are typically encapsulated in their own pressure vessel, but there is no requirement for all modules to be isolated. Each pressure vessel is designed to meet the desired shallow water depth rating of 150 feet (approx. 45 meters). To achieve this constraint, all pressure vessels in the current configuration are manufactured from 6061-T6 aluminum alloy that is hard-anodized for electrical insulation and corrosion resistance. Interconnections between modules are made using wet-mateable connectors, allowing for easy addition or removal in the work environment. The current configuration of SubjuGator 7 has the

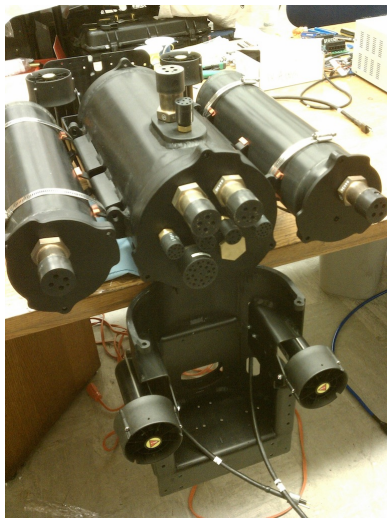


Figure 2: Demonstration of folding weldments which allow access to bulkheads and internal computer pressure vessel components through endcap removal.

- Dry Weight: 110 lb (*Trimmed to be 1% positively buoyant in water*)
- Overall Dimensions: 50"x18"x18" (LxWxH)
- Maximum Forward Thrust: 12 lbf (*Bollard Pull*)
- Maximum Vertical Thrust: 16 lbf (*Bollard Pull*)
- Maximum Horizontal Thrust: 8 lbf (*Bollard Pull*)

To incorporate the different modules into a suitable AUV platform, a 6061-T6 aluminum bottom hull was designed and manufactured. It is split into three folding weldments for easy access to the main pressure vessel or shipping, and acts to both streamline the underside of the AUV, as well as protect it from collision. Figure 2 demonstrates the use of the folding undercarriage/hull. The overall assembly configuration of SubjuGator 7 and each of its pressure vessels is shown in Figure 1. However, the top lid and cowlings that complete the hybrid torpedo/ROV shape are not shown.

All of the hardware components were manufactured over the last year by students on the SubjuGator team and volunteers. A few of the highlights in the the AUV's manufacturing are CNC machining, welding of all pressure vessels, and marriage of the DVL box to the main frame (Figure 3). Other tools used include a manufacturing laser, and waterjet. Custom endcaps and cabling were made to interface

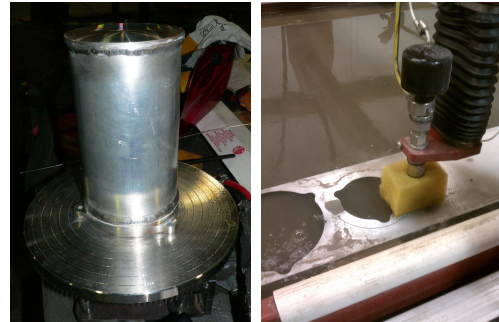
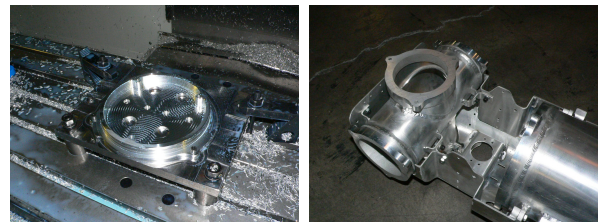


Figure 3: Top Left: CNC Machining of an endcap, Top Right: DVL box in the main frame, Bottom Left: Welding of a battery pod, Bottom Right: Waterjet cutting.



Figure 4: Custom cable potting for thrusters

A high level overview of the hardware for each module is presented in the following subsections.

A. Main Pressure Vessel

The main pressure vessel of the SubjuGator 7 AUV contains vehicle specific electrical hardware, and ample connections to environment sensors (e.g., cameras, hydrophone arrays, water temperature sensors, etc). It contains the following major components:

- COTS Intel Xeon Mainboard in Mini-ITX form factor
- COTS Dual 8 port Ethernet Switches
- 8 Motor Control/Power Stage Modules

The components inside the main pressure vessel are separated into two groups and are mounted on two independent trays, the computer tray and the rear tray. Each tray is attached to one of the endcaps and can be removed from the pressure vessel by removing the end cap. The computer tray houses the primary computer and its associated power supply. The rear tray houses the power distribution components, the networking hub and the motor control / power stage modules. Figure 5 shows each of the assembled main pressure vessel trays.

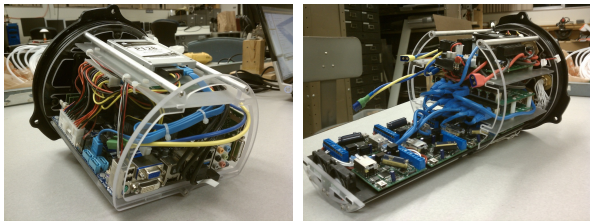


Figure 5: Left: Main Pressure Vessel Computer Tray, Right: Main Pressure Vessel Rear Tray

The primary computer performs environment sensing and mission level tasks. It also allows for the connectivity of USB peripherals, such as cameras and specialized data acquisition devices.

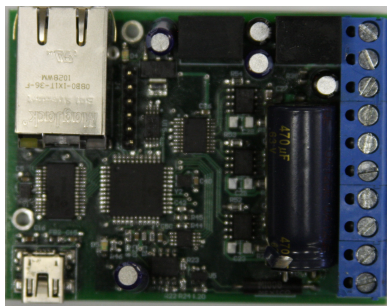


Figure 6: Motor Control/Power Stage Hardware

The motor control / power stage modules, Figure 6, incorporate algorithms and necessary sensor interfaces to safely control brushed or sensored brushless motors at 50V with a maximum load of 10A. Default communication is facilitated through the ethernet bus, however, each motor control/power stage can be configured to emulate a standard serial port over USB. Peak current, maximum current slew, maximum motor voltage, and many other programmable features are accessible via a web browser or a programmatic serial communication protocol. Each motor in the AUV design has a

each controller is used to encapsulate catastrophic failures to a single source instead of inducing multiple failure points, an advantage over previous design iterations.

Power management circuitry, shown in Figure 7, inside the main pressure vessel allows for multiple hot swappable external power supplies to be joined into two primary 16V and 32V rails, transparent to any devices that are powered. The design also preserves the complete isolation of these two rails, segmenting any inductive or heavily switching loads to a confined power space away from sensitive sensors and microelectronics. Furthermore, each power input's present voltage and current are monitored independently, enabling the power controller to shut down in the case of dangerous over current or under voltage situations. Audible commands help to inform the operator of system status when sealed and magnetic hall effect sensors allow for power control of the system without potential leaks through mechanical switches.

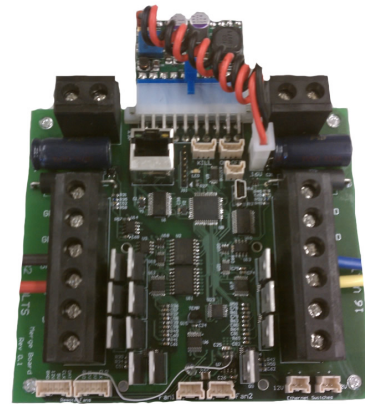


Figure 7: Power Management / Merge Hardware

Since nearly all of the individual modules in SubjuGator 7 were designed to communicate via ethernet, the main pressure vessel also houses the networking hub. The hub consists of two 8 port ethernet switches which allow each module to communicate to local network addresses internally as well as external addresses when SubjuGator 7 is actively tethered.

B. Navigation Pressure Vessel

One of the major contributions of the SubjuGator

components necessary to pilot an underwater vehicle. This modularization is evident both electrically and mechanically. The platform specific components (e.g., motor power stages, platform specific processing, etc.) have been removed, leaving only the core essentials to navigate and control a generic vehicle. Specifically, navigation sensors that are vehicle independent such as an inertial measurement unit (IMU), doppler velocity log (DVL), depth sensor, temperature sensor, and GPS receiver, and the processing capability to unify the data in the form of a navigation and control computer are integrated into the navigation pressure vessel. Since the majority of the sensors incorporated are common to most modern AUV platforms [1], only the custom designed navigation computer is described in more detail.

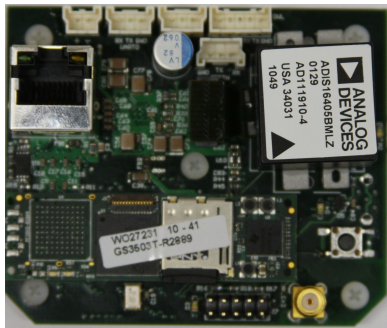


Figure 8: Navigation Computer

The navigation computer, Figure 8, consists of the following major components:

- Gumstix Overo Computer-On-Module (COM) containing a Texas Instruments OMAP3530 application processor at 720MHz
- Altera Cyclone II FPGA with level shifting and processing capabilities
- Analog Devices ADIS16405 9 degree of freedom IMU
- GPS receiver capable of 14 channel tracking and 10Hz update rate
- RS-232 connections to interface sensors
- 10/100BASE-TX Ethernet Communication

The components are combined on a custom printed circuit board (PCB) with a small form factor of 3"x2.5" and weighing less than 2 ounces excluding the GPS antenna which is typically platform specific. Despite its compact size, the board exposes enough processing power and sensor inputs to allow

Mechanically, all of the sensors and the navigation computer are isolated into a separate pressure vessel shown in Figures 9 and ?? with only two external connections required: 16V power in and ethernet for communication.

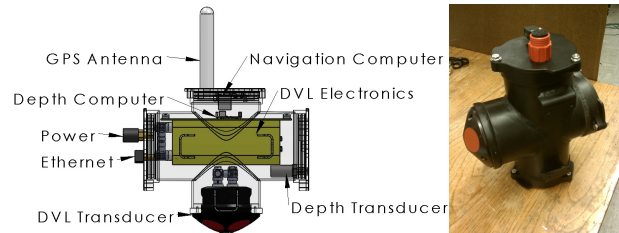


Figure 9: Navigation pressure vessel and internal configuration.

C. Battery Pressure Vessel

The mobile power for the AUV is stored inside two independent battery pressure vessels. Each pod contains a combination of 5Ah and 10Ah, 4 cell lithium polymer battery packs and connects to the main computer pressure vessel via waterproof cabling. Power regulating and battery monitor circuitry is included inside each battery pressure vessel to protect against low voltage and over current situations. Audible commands help to inform the operator of battery status when sealed and magnetic hall effect sensors allow for power control of the pod without potential leaks through mechanical switches.

D. Camera Pressure Vessel

Machine vision is incorporated into the AUV through the use of independently housed Point Grey



Figure 10: Battery pod pressure vessel and internal

machine vision cameras. The cameras are affordable and offer an easy to use USB interface to the video stream. The decision to design a separate pressure vessel for each camera is beneficial since both the number and location of cameras is freely adaptable up to the limit of the number of USB connections exposed by the main hull, presently 6. This can be increased, however, through the use of an external hub, discussed in a later section. Figure 11 shows a single camera assembled camera housing. The configuration in Figure 1 demonstrates the positioning of two cameras, one forward facing and one downward facing.



Figure 11: Camera pressure vessel with assembled Point Grey camera.

E. Hydrophone Pressure Vessel

The ability to track a point source of sound in the water is encapsulated into the hydrophone pressure vessel. It contains a custom designed hydrophone amplification and filtering board, Figure 12, necessary power regulation, and USB communication. The hardware is capable of tracking multiple acoustic sources simultaneously provided they are at different frequency.

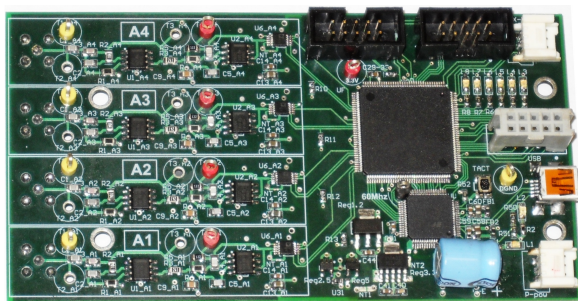


Figure 12: Hydrophone Amplification/Processing Hardware



Figure 13: Left: Ball dropper, Middle: Torpedo shooter, Right: Manipulator.

F. External Expansion Hub

An external expansion hub may be incorporated to allow for reasonable expansion. It is responsible for exposing necessary serial, USB, or ethernet ports to additional sensors, devices or vehicles, and multiplexing the data streams onto a single ethernet connection for communication with other system modules.

G. External Actuators

SubjuGator 7 has integrated three types of independently operated actuator mechanisms into its design. The mechanisms can be used to complete specific tasks in its environment and are controlled using electric solenoids. Currently the vehicle's capabilities include a single, multi-fire ball dropper, two single-fire torpedos, and two infinite-use manipulator claws. SubjuGator 7's configuration supports up to 10 independent actuators. Each of the currently integrated mechanisms are shown in Figure 13.

III. SOFTWARE DESIGN

In modern robotic development, many design options exist for software implementation. Major pushes toward multi-agent interoperability have spawned the necessity for seamless communication over varying mediums including shared memory, LAN, or even WAN. Two major communication standards used at the University of Florida are the Joint Architecture for Unmanned Systems (JAUS), and Data Distribution Services (DDS). These schemes are not directly compatible, however, the AUV must still be able to interoperate with other vehicles or control stations that may be utilizing either standard with minimal extra development time. To overcome this challenge, the standalone functionality of the AUV has been designed independently of any communication scheme. A sample software module, also referred to as a component,

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.